



VRL3000 SERIES

Framing construction to be 2 x 4 or larger

Standard Framing Dimensions

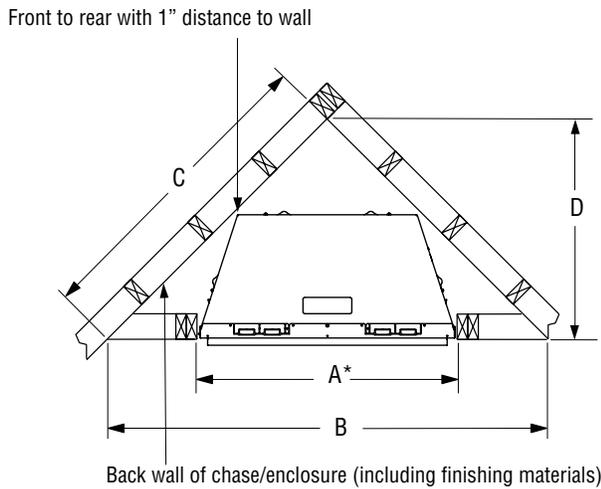

Corner

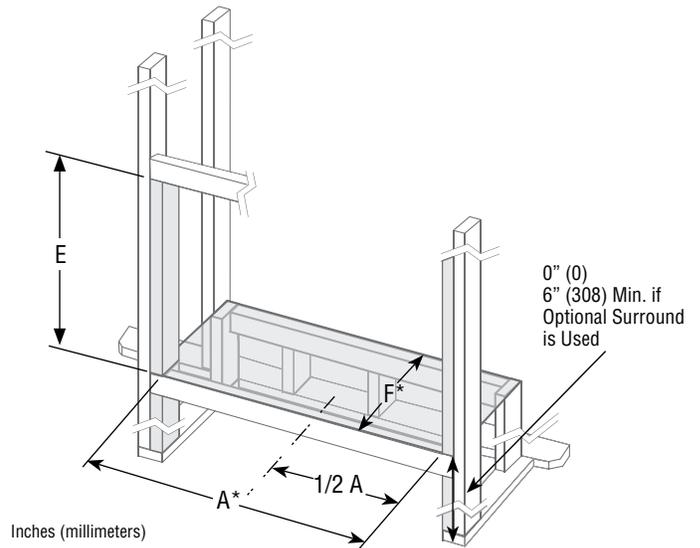


Standard

Model	A *	B	C	D	E	F*
45" Models	45-7/8 (1165)	70-3/8 (1788)	49-3/4 (1264)	35-1/4 (895)	29 (737)	18 (458)
55" Models	55-7/8 (1420)	82-3/4 (2102)	58-1/2 (1486)	41-3/8 (1051)	29 (737)	18 (458)

A* Minimum opening size: additional 1/8" per side is recommended.
F* For flush framing installations.
NOTE: If flush framing unit, field supplied non-combustible board will need to be used.

Fireplace Dimensions

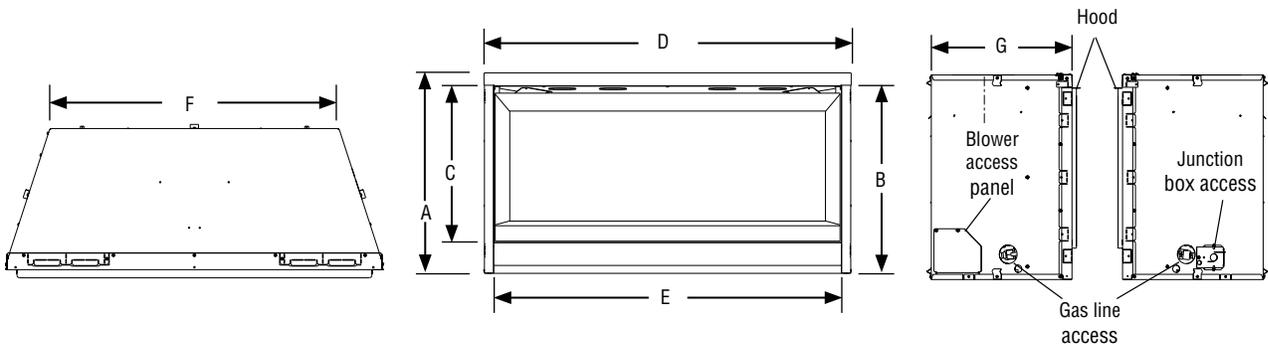

Top View

Front View

Left Side View


Right Side View

Model	A	B	C	D	E	F	G
45" Models	24-3/4 (629)	23-1/4 (591)	19-3/8 (492)	45-1/2 (1156)	42-7/8 (1089)	34-3/4 (883)	17 (432)
55" Models	24-3/4 (629)	23-1/4 (591)	19-3/8 (492)	55-1/2 (1410)	52-7/8 (1344)	44-3/4 (1137)	17 (432)


NOTE: DIAGRAMS & ILLUSTRATIONS ARE NOT TO SCALE.

VRL3000 SERIES

HeatFlo Framing Dimensions

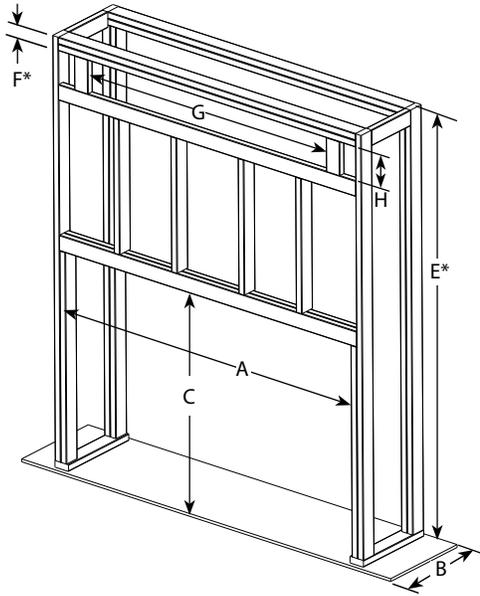

with HeatFlo Kit
for Flush Wall

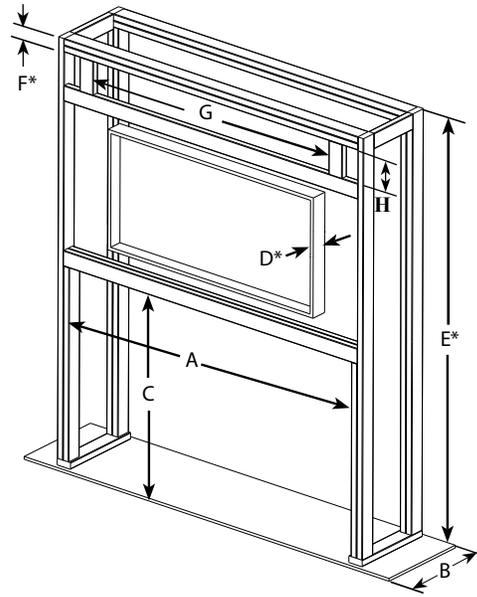

with HeatFlo Kit
for Recessed Wall Pocket

Framing Dimensions - Inches (millimeters)

	A	B	C	D*	E*	F*	G	H
45" Models	45-7/8 (1165)	18 (458)	29 (737)	3-1/2 (89)	81-1/2 (2070)	3-1/2 (89)	43-1/2 (1105)	5-1/8 (130)
55" Models	55-7/8 (1420)	18 (458)	29 (737)	3-1/2 (89)	81-1/2 (2070)	3-1/2 (89)	53-1/2 (1359)	5-1/8 (130)

D* Maximum allowable depth

E* Minimum height from appliance base to ceiling

F* Minimum distance from framed opening to ceiling

NOTE: Unit must be installed a minimum of 6" off floor if the optional surround is to be installed.

TVs should not be used in situations where the actual TV temperature exceeds the manufacturer's technical specification. Contact the TV manufacturer directly if you cannot locate this information or have questions regarding this information.

Shelf Height

Model	
45" Models	33"
55" Models	33"

CLEARANCES TO COMBUSTIBLES MUST BE MAINTAINED:
No combustible materials or insulation is permitted in the shaded area between the appliance and the shelf above it.

⚠ WARNING: CRITICAL INSTALLATION INFORMATION THAT IF NOT FOLLOWED CAN RESULT IN A SAFETY HAZARD!

NOTE: DIAGRAMS & ILLUSTRATIONS ARE NOT TO SCALE.

VRL3000 SERIES

Product Information

Listing Information

Fireplace Reference Information				
Cat. No.	Model	Description	Shipping Wt.	Shipping Vol.
F4683	VRL3045ZEN	45" Linear VF, Lights, Elec NG	150 lb.	11.9 cu. ft.
F4684	VRL3045ZEP	45" Linear VF, Lights, Elec LP	150 lb.	11.9 cu. ft.
F4685	VRL3055ZEN	55" Linear VF, Lights, Elec NG	170 lb.	14.8 cu. ft.
F4686	VRL3055ZEP	55" Linear VF, Lights, Elec NG	170 lb.	14.8 cu. ft.





Report No. F21-664

Listed by PFS TECO to - ANSI Z21.88 (in Canada, CSA-2.33), and CAN/CGA-2.17-M91 in both USA and Canada, as a vented gas fireplace heater.

Mantel Clearances

VRL3000 Series, Standard Installation

VRL3000 Series w/Accessory HeatFlo Kit Installed

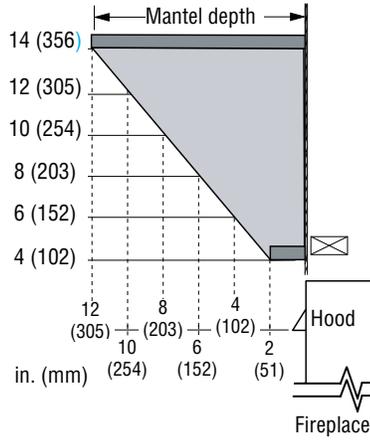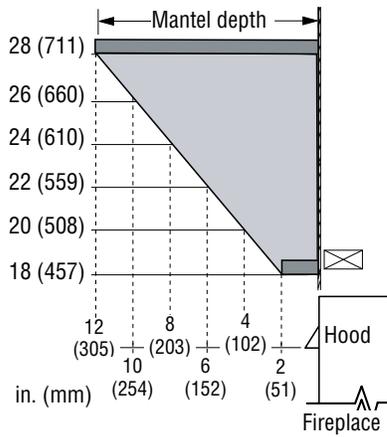

Clearances

Side Wall Clearances

