



## ZCV39/42

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY

The unit illustrated is a ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, LOGF3 Log Set - Five Piece, ZCV39RLT Refractory Brick Liner - Traditional and ZCV39S1BL Surround - Hearth Mount.



# ZCV39/42


ZERO CLEARANCE DIRECT VENT GAS FIREPLACE

Model	ZCV39N ZCV39NE	ZCV39LP ZCV39LPE	ZCV39NH ZCV39NHE	ZCV39LPH ZCV39LPHE
Fuel	Natural	Propane	Natural	Propane
Gas Control	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI
Input Max.	25,000 BTU	25,000 BTU	28,000 BTU	29,000 BTU
Input Min.	16,750 BTU	20,000 BTU	19,000 BTU	23,000 BTU
FE (P.4.1-02)	53.6%/54.9%	53.6%/54.9%	64.6%/67%	64.6%/67%
Glass Size	33" W x 28 5/8"H	33" W x 28 5/8"H	33" W x 28 5/8"H	33" W x 28 5/8"H
Venting	4/7" Flex or 4 x 6 5/8 Hard Pipe* or Power Vent			

\*Consult the manual for all approved venting.

## STANDARD FEATURES

- Dedicated Clean View appliance
- Millivolt or IPI valve system allows operation during a power failure with Hi/Low heat and flame adjustment
- Pan burner with Realistic Flame Pattern
- Safety Screen Barrier\*



Safety Screen Barrier

## OPTIONAL FEATURES

### Fan Kit

Heat activated with variable speed control

### Picture Frame Surrounds

#### ZCV39 Surrounds

- Hearth Mount 4" Wide (Covers 40 5/8" W x 35" H)
- Picture Frame 4" Wide (Covers 40 5/8" W x 37" H)
- Picture Frame 1 5/8" Wide (Covers 36 1/8" W x 32 1/2" H)

#### ZCV42 Surrounds

- Hearth Mount 4" Wide (Covers 44 5/8" W x 38 1/8" H)
- Picture Frame 4" Wide (Covers 44 5/8" W x 40 1/8" H)
- Picture Frame 1 5/8" Wide (Covers 40 1/8" W x 35 5/8" H)

### Porcelain Reflective Liner

### Glass Tray

Ember Glass (Bronze)

### Accent Lighting

For use with the Glass Tray

### Log Set

LOGF3 Log Set – Five Pieces

### Brick Refractory Liner

Traditional, Herringbone, Red Herringbone and Stacked

### Thermostat

Wall Mount Millivolt Thermostat or Programmable Thermostat

### Remote Control

Thermostat on/off, Thermostat on/off modulating, Thermostat on/off modulating and fan control.



\* All gas fireplaces manufactured as of January 1, 2015 will include a Safety Screen Barrier.



The unit illustrated is a ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, ZCV39GT Glass Tray, RBCB1 Cannonballs, ZCV39PL Porcelain Reflective Liner and ZCV39S2PFB Surround - Picture Frame 1 5/8" Wide.



The unit illustrated is a ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, LOGF3 Log Set - Five Piece, ZCV39RLS Refractory Brick Liner - Stacked.



THE ULTIMATE IN DESIGN, ENGINEERING & QUALITY



2340 Logan Avenue  
Winnipeg, Manitoba, Canada R2R 2V3  
Phone: (204) 632-1962 Fax: (204) 632-1960  
[www.kingsmanfireplaces.com](http://www.kingsmanfireplaces.com)

## ZCV39/42

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE



\*Components may have to be ordered separately to create a complete unit. Discuss with your local Kingsman dealer for clarification.

Kingsman Fireplaces maintains a program of continuous testing, refinement and improvements of all its products. Some aspect of units shown here may be changed at any time without notice or obligation.  
Certification: ZCV39NH, ZCV39NE, ZCV39LD, ZCV39LPE, ZCV42N, ZCV42NE, ZCV42LP, ZCV42LPE are Certified to: ANSI Z21.50-2014, CSA 2.22-2014, CGA 2.17-M91 (R2009) Vented Gas Fireplace.  
ZCV39NH, ZCV39NHE, ZCV39LPH, ZCV39LPHE, ZCV42NH, ZCV42NHE, ZCV42LPH, ZCV42LPHE are Certified to: ANSI Z21.88-2014, CSA 2.33-2014, CGA 2.17-M91 (R2009) Vented Gas Fireplace Heater.

# DESIGNER CLEAN VIEW™ FIREPLACES

ZCV42N	ZCV42LP	ZCV42NH	ZCV42LPH
ZCV42NE	ZCV42LPE	ZCV42NHE	ZCV42LPHE
Natural	Propane	Natural	Propane
Millivolt / IPI	Millivolt / IPI	Millivolt / IPI	Millivolt / IPI
25,000 BTU	25,000 BTU	29,500 BTU	29,000 BTU
16,500 BTU	19,500 BTU	20,000 BTU	23,000 BTU
54.2%/55.7%	54.2%/55.7%	65.2%/67.2%	65.2%/67.2%
37 1/8" W x 31 3/4"H	37 1/8" W x 31 3/4"H	37 1/8" W x 31 3/4"H	37 1/8" W x 31 3/4"H

The ultimate in Zero Clearance Direct Vent Fireplaces for new home construction or renovation, and your best choice for installation anywhere throughout your home.

## OPTIONS



The unit illustrated is a ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, LOGF3 Log Set - Five Piece, ZCV39RLH Refractory Brick Liner -Herringbone.



The unit illustrated is a ZCV39NH Zero Clearance Direct Vent Gas Fireplace Natural Gas, ZCV39GT Glass Tray, RBCB1 Cannonballs, and ZCV39PL Porcelain Reflective Liner.

## STYLING



LOGF3 Log Set - Five Pieces




Multi-coloured Cannonballs




Decorative Ember Glass




Traditional Brick Liner RLT



Herringbone Brick Liner RLH



Red Herringbone Brick Liner RRH




Stacked Brick Liner RLS

## CORNER

	ZCV39	ZCV42
A	39 1/2"	42 1/2"
B	11 3/4"	11 3/4"
C	31 1/2"	33"
D	19"	20 1/2"
E	43"	45 1/8"
F	39 1/2"	41 5/8"
G	-	-
H	-	-

## FRONT VIEW

	ZCV39	ZCV42
A	39 3/8"	42 3/8"
B	24 1/8"	27 1/4"
C	29 3/8"	33 3/8"
D	33"	37 1/8"
E	34 1/2"	37 3/8"
F	37 3/4"	40 7/8"
G	3"	2 1/2"
H	29 3/8"	32 1/2"

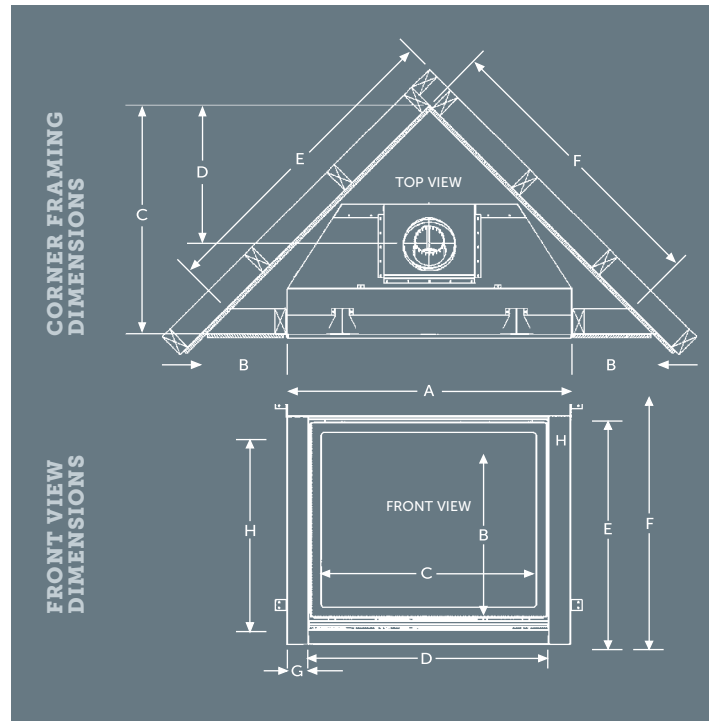

## UNIT AND FRAMING SPECIFICATIONS (IN.)

Top Flue Models	Height Actual	Height Framing	Width Actual	Width Framing	Depth Actual	Depth Framing
ZCV39	37 3/4"	37 7/8"	39 3/8"	39 1/2"	18 3/8"	18 1/2"
ZCV42	40 7/8"	41"	42 3/8"	42 1/2"	18 3/8"	18 1/2"